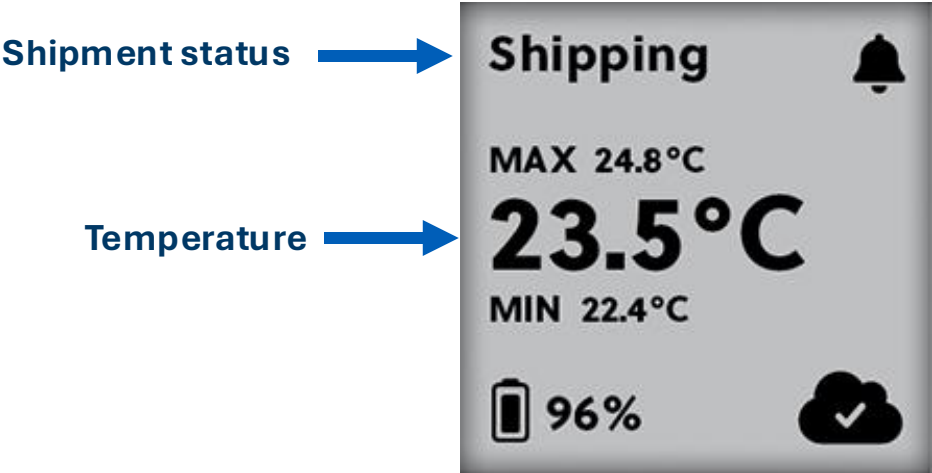

Saga™ Device


Display icons & alerts



Display icons and alerts



Shipment status	
Free	The device is in standby mode and has not received any information about being assigned to a shipment.
Paired	The device has received shipment information from the cloud, but the starting conditions have not been met.
Shipping	The device is assigned to a shipment and has met the starting conditions. Data is uploaded to the cloud as per wake-up interval.
Stopping	The stop button is pushed while the device is in an active shipment.
Stopped	Stopping conditions are met. The device has been delivered.

Temperature	
MAX 24.8°C 23.5°C MIN 22.4°C	The center displays the last registered temperature. Max/Min values registered during a shipment are shown above/below the last registered temperature while the device is paired with an active shipment or has recently been delivered.
 Display does not function in the current temperature.	The display is inactive due to the temperature being below 0°C (32°F) or above 50°C (122°F). The device continues to function and collect data within its operation range.

Display icons and alerts

Battery status

Cloud connection status







Shipping





MAX 24.8°C

23.5°C

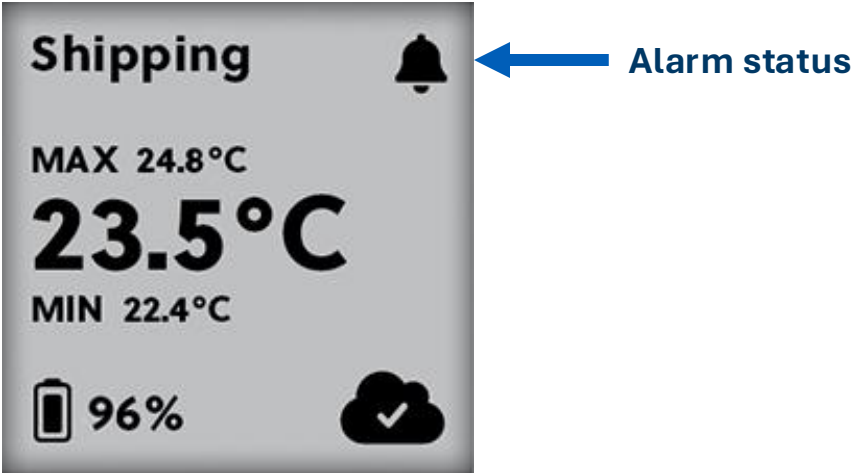
MIN 22.4°C


96%


Battery status	
	A USB icon appears for a few moments when the device is plugged in to a charging station or a USB port on a computer.
	The battery is currently charging. It can charge in a Controlant charging station, USB charging adapter or a computer USB port.
	Charging has paused due to the device detecting the ambient temperature below 0°C (32°F) or above 37°C (98.6°F). Charging will restart once the device heats up or cools down respectively.
	The device is plugged in, and the battery is fully charged.
	The remaining battery percentage represented by the black bar and the percentage.
 <div>Low power mode Logger is now in low power mode. Please charge device.</div>	The battery level is below 10%.

Cloud connection status	
	Syncing: The device is attempting to connect and sync with the cloud.
	Successful connection: The device has successfully connected to the cloud during its last wake-up.
	Failed connection: The device was unable to connect to the cloud during its last wake-up, usually due to poor cellular reception.
	Flight mode: The device has detected that it's on a flight so will temporarily stop attempting to the cloud.

Display icons and alerts



Alarm status	
	Temperature excursion(s) occurred in the shipment. This icon will remain present throughout the shipment. If no icon is present, the temperature was within range for the full shipment duration.

Full screen messages	
 Device needs service	The device requires service. Set the device aside and follow the existing process to return it to Controlant. The device can only display this message when its status is free (and cannot be added to a new shipment).